



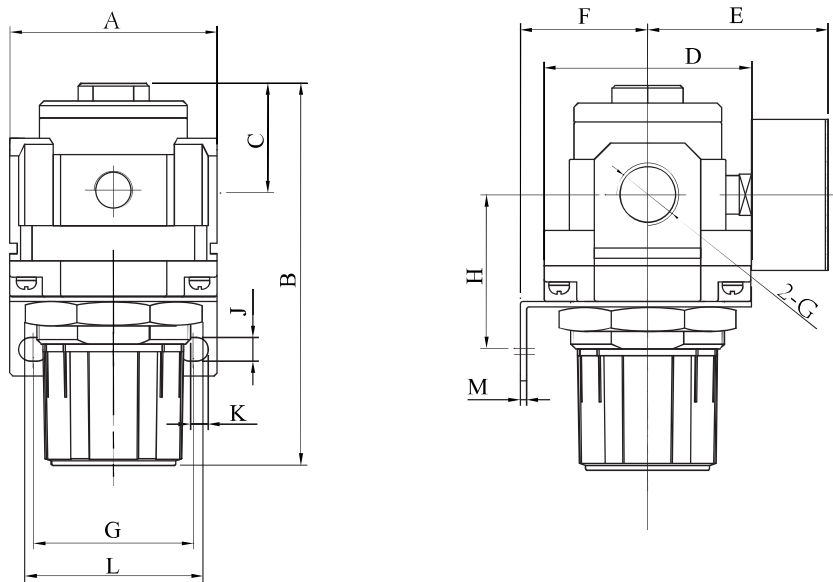
FILTER | REGULATOR | LUBRICATOR


ORDERING CODE

AR	-	2000	-	02
Series		Shell size		Thread
		2000		02:1/4"
		4000		04:1/2"

SPECIFICATIONS

MODEL	AR2000-02	AR4000-04
Proof Pressure	1.5mpa (15.3kgf/cm ²)	
Max. Working Pressure	1.0mpa (10.2kgf/cm ²)	
Environment and Fluid Temperature	5~60°C	
Pressure Regulating Range	0.05~0.85mpa (0.51~8.7kgf/cm ²)	

DIMENSIONS


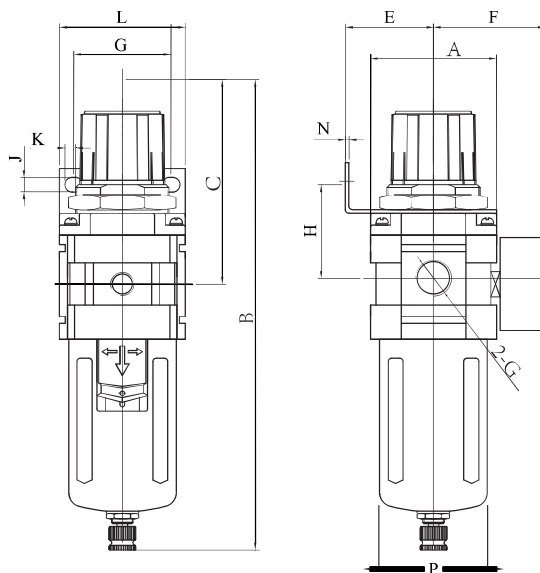
MODEL	Port Size (G)	A	B	C	D	E	F	G	H	J	K	L	M	N
AR2000-02	1/4"	40	95	17	40	56.8	30	34	44	5.4	15.4	55	2.3	33.5
AR4000-04	1/2"	70	149.5	37.5	70	65.5	50	54	54	8.5	10.5	70	2.3	52.5


ORDERING CODE

AW	-	2000	-	02
Series		Shell size		Thread
		2000		02:1/4"
		4000		04:1/2"

SPECIFICATIONS

MODEL	AW2000-02	AW4000-04
Proof Pressure	1.5mpa (15.3kgf/cm ²)	
Max. Working Pressure	1.0mpa (10.2kgf/cm ²)	
Environment and Fluid Temperature	5~60°C	
Filter Aperature	5 μm	
Pressure Regulating Range	0.05~0.85mpa (0.51~8.7kgf/cm ²)	

DIMENSIONS


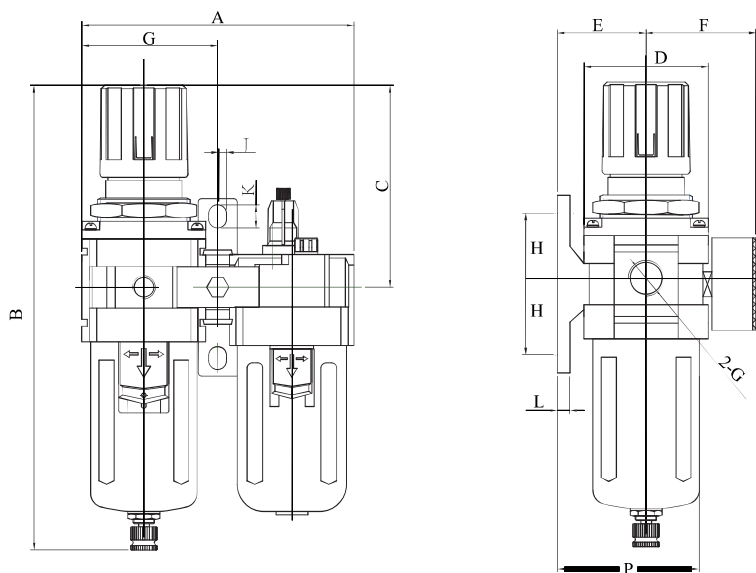
MODEL	Port Size (G)	A	B	C	D	E	F	G	H	J	K	L	M	N	P
AW2000-02	1/4"	40	164.5	78	40	56.8	30	34	45	5.4	15.4	55	2.3	33.5	40
AW4000-04	1/2"	70	262.5	112	70	70.5	50	54	54	8.5	10.5	70	2.3	52.5	73


ORDERING CODE

AC	-	2010	-	02
Series		Shell size		Thread
		2010		02:1/4"
		4010		04:1/2"

SPECIFICATIONS

MODEL	AC2010-02	AC4010-04
Proof Pressure	1.5mpa (15.3kgf/cm ²)	
Max. Working Pressure	1.0mpa (10.2kgf/cm ²)	
Environment and Fluid Temperature	5~60°C	
Filter Aperture	5 μm	
Pressure Regulating Range	0.05~0.85mpa (0.51~8.7kgf/cm ²)	

DIMENSIONS


MODEL	Port Size (G)	A	B	C	D	E	F	G	H	J	K	L	M	N	P
AC2010-02	1/4"	90	164.5	78	40	56.8	30	45	24	5.5	8.5	5	22	23	50
AC4010-04	1/2"	154	262.5	112	70	70.5	50	77	40	9	13	7	42.2	33	88